




Performance Bulletin – 200 Pro V



RPM	MPH	GPH	MPG
1000	4.8	0.6	8.00
3000	7.5	1.4	5.36
3600	21.9	3.3	6.64
4200	26.1	4.0	6.53
4600	30.5	5.8	5.26
5400	37.1	8.3	4.47
6000	40.1	10.4	3.86

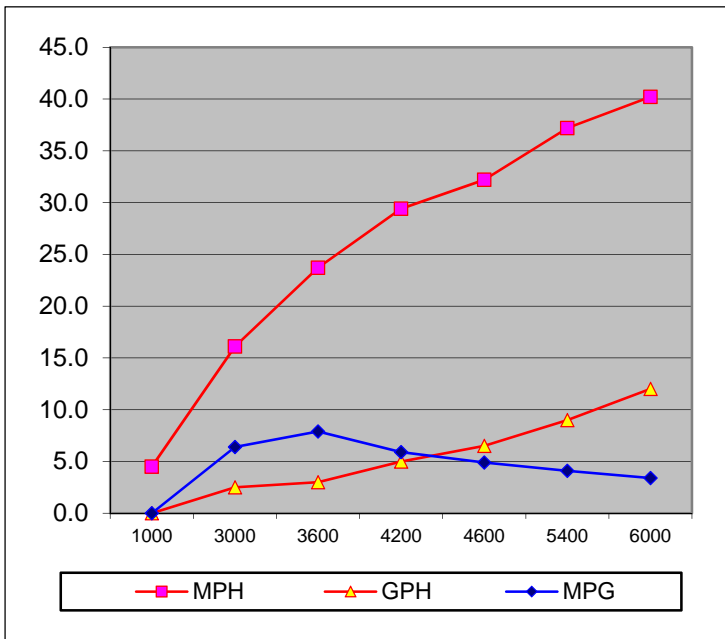

Time to plane: N/A Seconds Acceleration 0-30 MPH: N/A Seconds

Hewescraft® 200 Pro V

Test Date 9/14/05

Length	20'4"
Beam	94"
Dry Weight (Boat only)	1,700 lbs
Maximum HP	175
Fuel Capacity	48
Weight as tested (Approximate)	N/A lbs

Note: Test weight includes ½ tank of fuel, 1 battery, safety & test Equipment

Honda 135

Horsepower	135 HP
Displacement	144 cu. in.
Dry Weight (engine)	478 lbs
Gear Ratio	2.14:1
Mounting Height	#2

Propellers

Material /Blades	Aluminum / 3
Series	Aluminum Series
Diameter/Pitch	13 x 17
Honda Part #	N/A

Test Conditions

Number of People	2
Air Temperature (Fahrenheit)	72 ° F
Elevation (in feet above sea level)	1,300 ft.
Wind Velocity	0 – 5 mph



HONDA
MARINE


Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



Performance Bulletin – 200 Pro V



RPM	MPH	GPH	MPG
1000	4.5	0.0	0.0
3000	16.1	2.5	6.4
3600	23.7	3.0	7.9
4200	29.4	5.0	5.9
4600	32.2	6.5	4.9
5400	37.2	9.0	4.1
6000	40.1	12.0	3.4

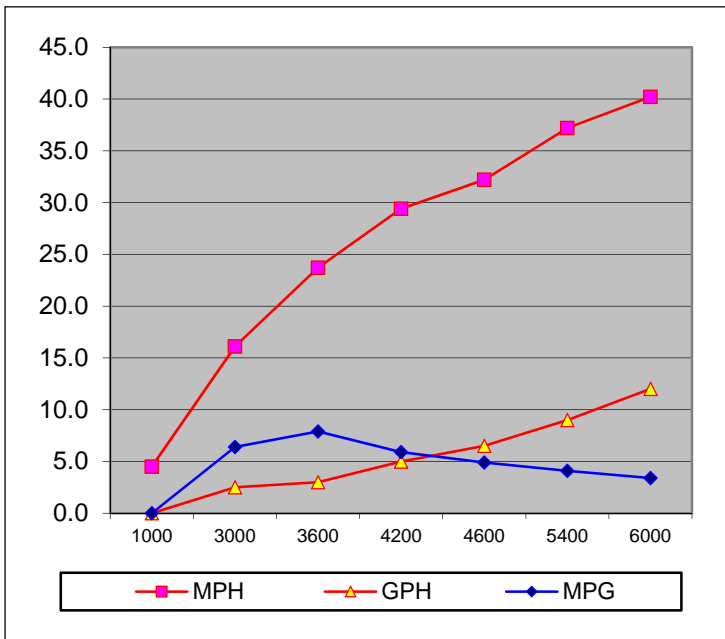

Time to plane: N/A Seconds Acceleration 0-30 MPH: N/A Seconds

Hewescraft® 200 Pro V

Test Date 9/14/05

Length	20'3"
Beam	93"
Dry Weight (Boat only)	1,550 lbs
Maximum HP	160
Fuel Capacity	48
Weight as tested (Approximate)	N/A lbs

Note: Test weight includes 40 gallons of fuel, 1 battery, safety & test Equipment

Honda 135

Horsepower	135 HP
Displacement	144 cu. in.
Dry Weight (engine)	478 lbs
Gear Ratio	2.14:1
Mounting Height	#2

Propellers

Material /Blades	Aluminum / 3
Series	Aluminum Series
Diameter/Pitch	13 x 17
Honda Part #	N/A

Test Conditions

Number of People	2
Air Temperature (Fahrenheit)	72 ° F
Elevation (in feet above sea level)	1,300 ft.
Wind Velocity	0 – 5 mph



HONDA
MARINE

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



Performance Bulletin – 200 Pro V



Hewescraft® 200 Pro V

Test Date 7/15/08

Length	20'3"
Beam	93"
Dry Weight (Boat only)	1,550 lbs
Maximum HP	175
Fuel Capacity	48
Weight as tested (Approximate)	2,482 lbs

Note: Test weight includes 12 gallons of fuel, 1 battery, safety & test Equipment

Honda 150

Horsepower	150 HP
Displacement	2.4 L.
Dry Weight (engine)	485 lbs
Gear Ratio	2.14:1
Mounting Height	#2


Propellers

Material /Blades	Aluminum / 3
Series	Aluminum Series
Diameter/Pitch	14 ¾ x 15
Honda Part #	N/A

RPM	MPH	GPH	MPG
1000	4.0	0.0	0.0
1500	6.0	0.9	6.7
2000	7.4	1.3	5.7
2500	10.2	1.9	5.4
3000	15.7	2.5	6.3
3500	20.4	3.1	6.6
4000	24.5	4.0	6.1
4500	28.5	5.0	5.7
5000	31.7	6.7	4.7
5500	34.9	8.4	4.2
6000	37.9	10.0	3.8
WOT	40.0	11.2	3.6

Test Conditions

Number of People	2
Air Temperature (Fahrenheit)	70 ° F
Elevation (in feet above sea level)	1,300 ft.
Wind Velocity	0 – 5 mph

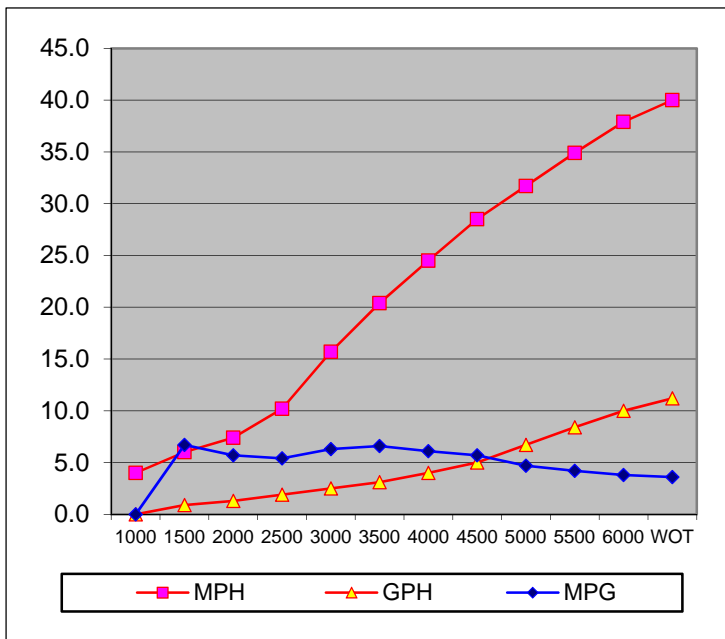

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

Time to plane: N/A Seconds Acceleration 0-30 MPH: N/A Seconds



Performance Bulletin – 200 Pro V



Hewescraft® 200 Pro V

Test Date 7/15/08

Length	20'3"
Beam	93"
Dry Weight (Boat only)	1,550 lbs
Maximum HP	175
Fuel Capacity	48
Weight as tested (Approximate)	2,482 lbs

Note: Test weight includes 12 gallons of fuel, 1 battery, safety & test Equipment

Honda BF150

Horsepower	150 HP
Displacement	2.4 L.
Dry Weight (engine)	485 lbs
Gear Ratio	2.14:1
Mounting Height	#2

Propellers

Material /Blades	Stainless / 3
Series	Power Tech Series
Diameter/Pitch	14 ¼ x 19
Honda Part #	N/A

RPM	MPH	GPH	MPG
Idle	3.3	0.0	0.0
1000	4.2	0.6	7.0
1500	6.5	1.1	5.9
2000	8.8	1.5	5.9
2500	14.4	2.0	7.2
3000	21.1	2.8	7.5
3500	26.7	3.8	7.0
4000	30.9	5.0	6.2
4500	35.0	6.5	5.4
5000	38.4	8.2	4.7
5500	41.6	10.7	3.9
WOT	44.5	14.2	3.1


Test Conditions

Number of People	2
Air Temperature (Fahrenheit)	70 ° F
Elevation (in feet above sea level)	1,280 ft.
Wind Velocity	0 - 5 mph



HONDA
MARINE

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

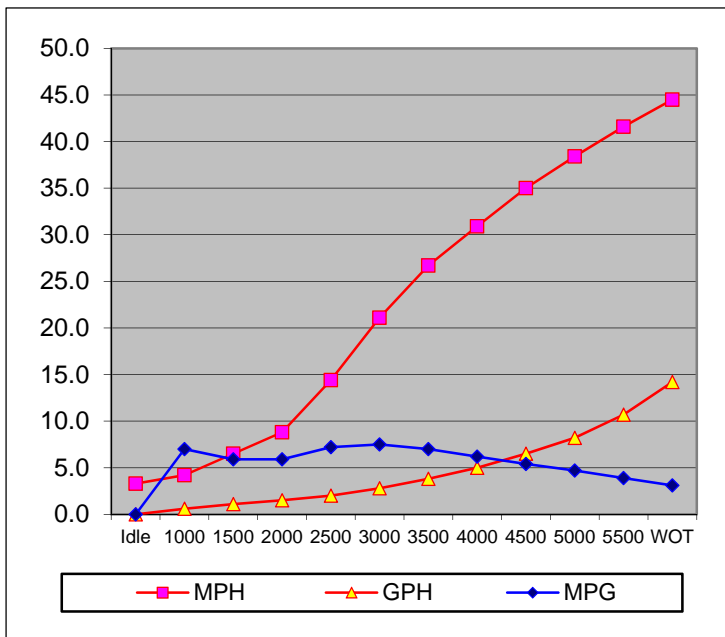

Time to plane: 3.8 Seconds Acceleration 0-20 MPH: 5.0 Seconds



Performance Bulletin – 200 Pro V



Hewescraft® 200 Pro V

Test Date 7/15/08

Length	20'3"
Beam	93"
Dry Weight (Boat only)	1,550 lbs
Maximum HP	175
Fuel Capacity	48
Weight as tested (Approximate)	2,658 lbs

Note: Test weight includes 30 gallons of fuel, 1 battery, safety & test Equipment

Honda BF150

Horsepower	150 HP
Displacement	2.4 L.
Dry Weight (engine)	485 lbs
Gear Ratio	2.14:1
Mounting Height	#2

Propellers

Material /Blades	Stainless / 3
Series	Solas Series
Diameter/Pitch	14 ¾ x 17
Honda Part #	N/A


RPM	MPH	GPH	MPG
Idle	3.2	0.0	0.0
1000	4.6	0.6	7.7
1500	6.3	0.9	7.0
2000	7.7	1.3	5.9
2500	9.6	2.0	4.8
3000	16.6	2.6	6.4
3500	21.9	3.4	6.4
4000	27.2	4.6	5.9
4500	31.4	5.5	5.7
5000	35.7	7.2	5.0
5500	39.3	9.6	4.1
WOT	43.3	14.4	3.0

Test Conditions

Number of People	2
Air Temperature (Fahrenheit)	65 ° F
Elevation (in feet above sea level)	1,280 ft.
Wind Velocity	0 – 5 mph



Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

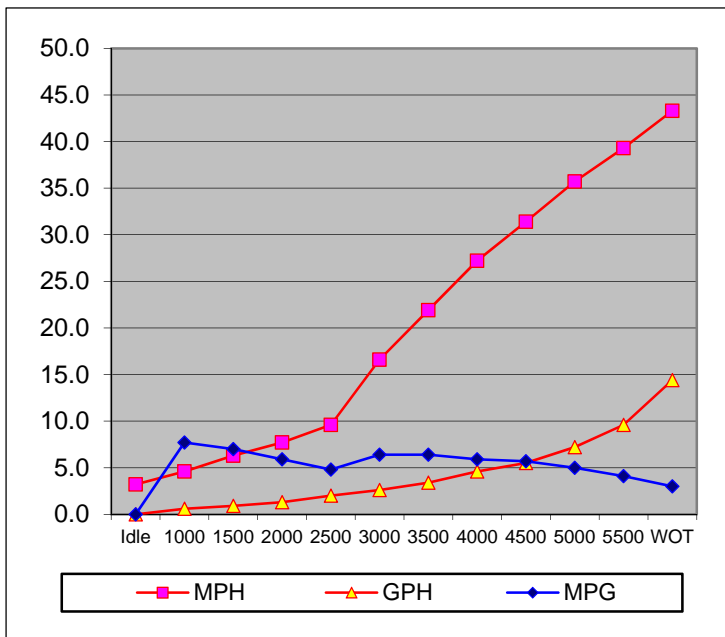

Time to plane: 4.7 Seconds Acceleration 0-20 MPH: 5.4 Seconds



Performance Bulletin – 200 Pro V



Hewescraft® 200 Pro V

Test Date 9/19/11

Length	20'4"
Beam	94'
Dry Weight (Boat only)	1700 lbs
Maximum HP	175
Fuel Capacity (at testing)	48 gallons
Weight as Tested (approximate)	N/A lbs

Note: Test weight includes 15 gallons of fuel, 1 battery, safety & test Equipment

Mercury 150 Four Stroke

Horsepower	175 HP
Displacement	3.0 L
Dry Weight (engine)	455 lbs
Gear Ratio	1.92:1
Mounting Height	#2


Propellers

Material/Blades	3 Blade SS
Series	Enerzia
Diameter/ Pitch	14 x 17
Mercury Part #	48-898994A46

Test Conditions

Number of People	2
Air / Water Temperature (Fahrenheit)	35° F
Elevation (in feet above sea level)	2200 ft.
Wind Velocity	0-10 mph

RPM	MPH	GPH	MPG
1000	5	0.9	5.6
2000	8.8	2.2	4.0
3000	21.5	7.0	3.1
3500	25.2	5.4	4.7
4000	30	6.4	4.7
4500	35	8.9	3.9
5000	39.5	11.4	3.5
5500	45.5	13.7	3.3

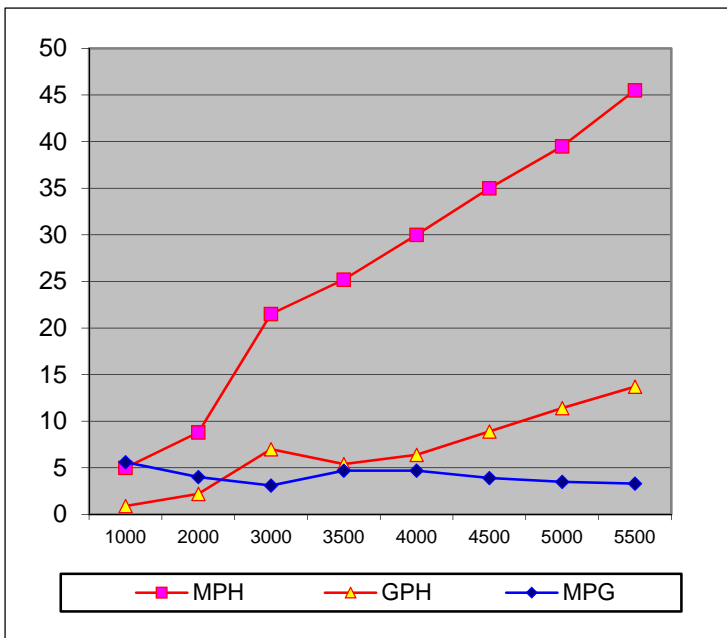

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Mercury reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.


Time to plane: N/A Seconds Acceleration 0-30 MPH: 5.4 Seconds



Performance Bulletin – 200 Pro V



RPM	MPH	GPH	MPG
1000	4.8	0.6	8.00
1500	6.2	1.0	6.20
2000	7.5	1.4	5.36
2500	10.4	2.0	5.20
3000	16.1	2.6	6.19
3500	21.9	3.3	6.64
4000	26.1	4.0	6.53
4500	30.5	5.8	5.26
5000	33.3	6.7	4.97
5500	37.1	8.3	4.47
5700	40.1	10.4	3.86

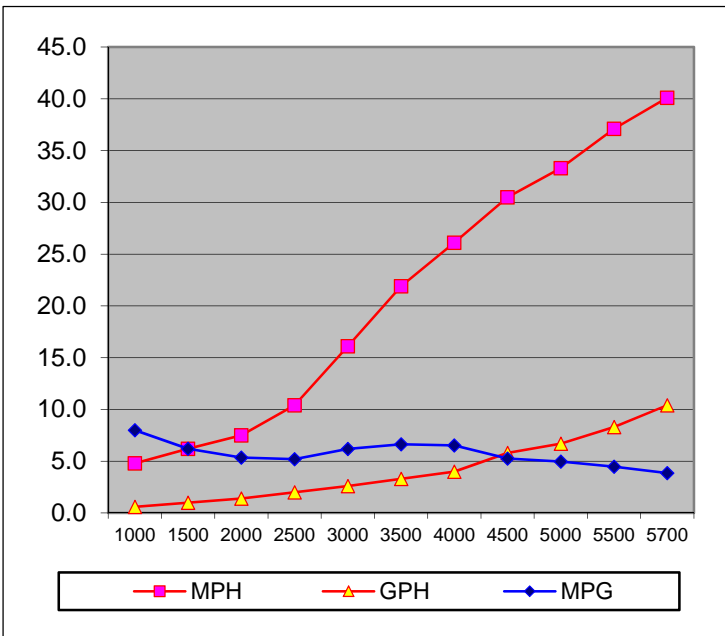

Time to plane: 4.70 Seconds Acceleration 0-30 MPH: N/A Seconds

Hewescraft® 200 Pro V

Test Date 10/21/12

Length	20'4"
Beam	94"
Dry Weight (Boat only)	1,700 lbs
Maximum HP	175
Fuel Capacity	48
Weight as tested (Approximate)	2,591 lbs

Note: Test weight includes ½ tank of fuel, 1 battery, safety & test Equipment

Yamaha F115 TXR

Horsepower	115 HP
Displacement	106.2 cu. in.
Dry Weight (engine)	412 lbs
Gear Ratio	2.15
Mounting Height	#2

Propellers

Material /Blades	Aluminum / 3
Series	Aluminum Series
Diameter/Pitch	13 x 19
Yamaha Part #	6E5-45941-00-EL

Test Conditions

Number of People	2
Air Temperature (Fahrenheit)	64° / 48 ° F
Elevation (in feet above sea level)	1,300 ft.
Wind Velocity	0 – 5 mph



Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



Performance Bulletin – 200 Pro V



Hewescraft® 200 Pro V

Test Date 10/20/08

Length	20'3"
Beam	94"
Dry Weight (Boat only)	1,550 lbs
Maximum HP	175
Fuel Capacity	48
Weight as tested (Approximate)	2,654 lbs

Note: Test weight includes ½ tank of fuel, 1 battery, safety & test Equipment

Yamaha F150 TXR

Horsepower	150 HP
Displacement	163 cu. in.
Dry Weight (engine)	475 lbs
Gear Ratio	2.00
Mounting Height	#2


Propellers

Material /Blades	SS / 3
Series	Reliance Series
Diameter/Pitch	13 ¾ x 19
Yamaha Part #	68F-45974-00-00

RPM	MPH	GPH	MPG
1000	5.1	0.7	7.29
1500	7.0	1.2	5.83
2000	9.0	2.0	4.50
2500	15.4	2.8	5.50
3000	22.9	3.9	5.87
3500	28.5	5.1	5.59
4000	34.3	6.8	5.04
4500	39.0	8.7	4.48
5000	43.7	11.0	3.97
5500	48.3	14.6	3.31
5700	49.4	16.0	3.09

Test Conditions

Number of People	2
Air / Water Temperature (Fahrenheit)	62° / 47° F
Elevation (in feet above sea level)	1,300 ft.
Wind Velocity	5-10 mph

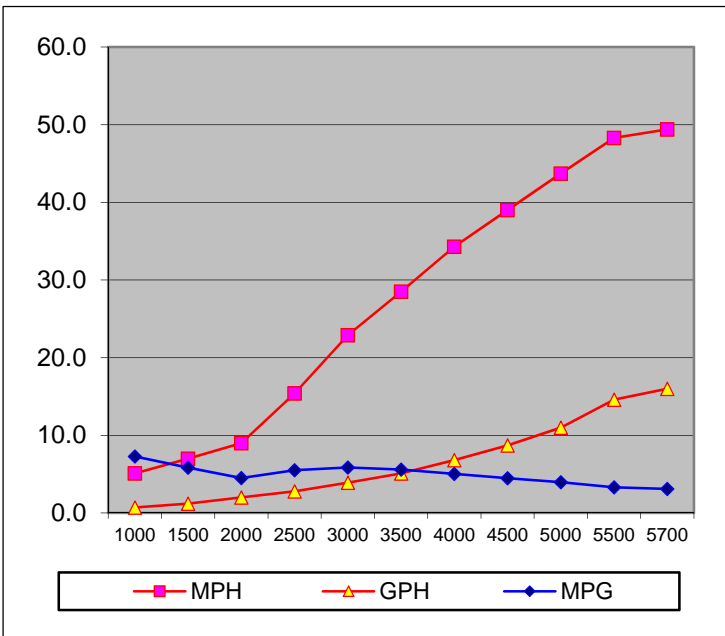

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

Time to plane: 3.39 Seconds Acceleration 0-30 MPH: N/A Seconds



Performance Bulletin – 200 Pro V HT



Hewescraft® 200 Pro V HT

Test Date 10/21/12

Length	20'3"
Beam	94"
Dry Weight (Boat only)	1,775 lbs
Maximum HP	175
Fuel Capacity	48
Weight as tested (Approximate)	2,440 lbs

Note: Test weight includes 1/3 tank of fuel, 1 battery, safety & test Equipment

Yamaha F115 TXR

Horsepower	115 HP
Displacement	106.2 cu. in.
Dry Weight (engine)	412 lbs
Gear Ratio	2.15
Mounting Height	#2


Propellers

Material /Blades	Aluminum / 3
Series	Aluminum Series
Diameter/Pitch	13 ¼ x 17
Yamaha Part #	6E5-45941-00-EL

RPM	MPH	GPH	MPG
1000	4.5	.5	8.9
1500	5.8	.8	7.7
2000	7.1	1.2	5.9
2500	9.0	2.0	4.6
3000	13.7	2.5	5.5
3500	18.8	2.9	6.0
4000	23.4	3.5	6.7
4500	28.2	5.1	5.6
5000	32.2	5.9	5.5
5500	35.3	7.5	4.7
6000	38.6	10.1	3.8

Test Conditions

Number of People	2
Air Temperature (Fahrenheit)	55 ° F
Elevation (in feet above sea level)	1,300 ft.
Wind Velocity	0 – 5 mph

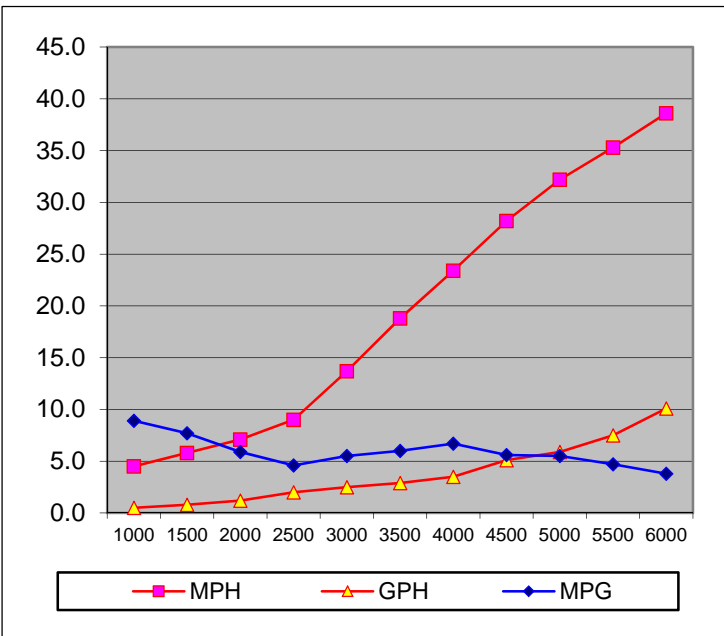

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

Time to plane: 4.70 Seconds Acceleration 0-30 MPH: N/A Seconds



Performance Bulletin – 200 Pro V HT



Hewescraft® 200 Pro V HT

Test Date 3/26/09

Length	20'3"
Beam	94"
Dry Weight (Boat only)	1,775 lbs
Maximum HP	175
Fuel Capacity	48
Weight as tested (Approximate)	2,525 lbs

Note: Test weight includes ½ tank of fuel, 1 battery, safety & test Equipment

Yamaha F150 TXR

Horsepower	150 HP
Displacement	163 cu. in.
Dry Weight (engine)	475 lbs
Gear Ratio	2.00
Mounting Height	#2


Propellers

Material /Blades	SS / 3
Series	Reliance Series
Diameter/Pitch	14 ¼ x 17
Yamaha Part #	68F-45974-00-00

RPM	MPH	GPH	MPG
1000	4.8	0.4	12.0
1500	6.6	0.8	7.8
2000	8.2	1.6	5.2
2500	12.2	2.1	5.8
3000	18.6	2.8	6.6
3500	24.7	4.1	6.0
4000	29.1	5.4	5.4
4500	33.3	7.3	4.6
5000	37.3	9.1	4.1
5500	40.8	12.0	3.4
5700	45.0	16.0	2.8

Test Conditions

Number of People	2
Air / Water Temperature (Fahrenheit)	62° / 47 ° F
Elevation (in feet above sea level)	1,300 ft.
Wind Velocity	5-10 mph

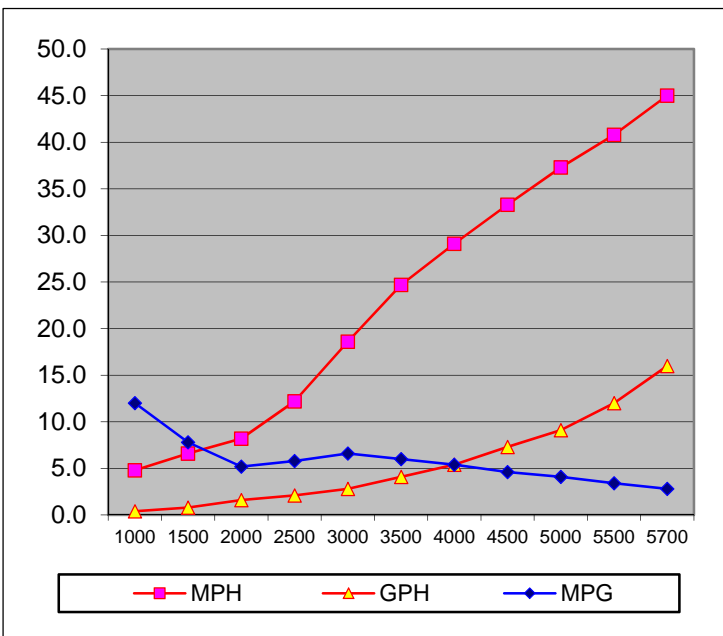

Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.

Time to plane: 3.65 Seconds Acceleration 0-30 MPH: 5.92 Seconds



Performance Bulletin – 180 Pro V ET HT



Hewescraft® 180 Pro V ET HT

Test Date 9/5/12

Length	26'5"
Beam	94'
Dry Weight (Boat only)	1875 lbs
Maximum HP	175
Fuel Capacity	48 gallons
Weight as Tested (approximate)	2560 lbs

Note: Test weight includes 40 gallons of fuel, 1 battery, safety & test Equipment

Mercury 150 Four Stroke

Horsepower	150 HP
Displacement	3.0 L
Dry Weight (engine)	455 lbs
Gear Ratio	1.92:1
Mounting Height	#2


Propellers

Material/Blades	3 Blade SS
Series	Enerzia
Diameter/ Pitch	14 ½ x 17
Mercury Part #	898994A46

RPM	MPH	GPH	MPG
1000	5	0.8	6.3
2000	8	2.1	3.8
3000	19	3.8	5
3500	25	5	5
4000	30	7.1	4.2
4500	35	8.6	4.1
5000	39	11.5	3.4
5500	45	12.2	3.7
5700	46	13.6	3.4

Test Conditions

Number of People	2
Air / Water Temperature (Fahrenheit)	65° F
Elevation (in feet above sea level)	1300 ft.
Wind Velocity	5 mph

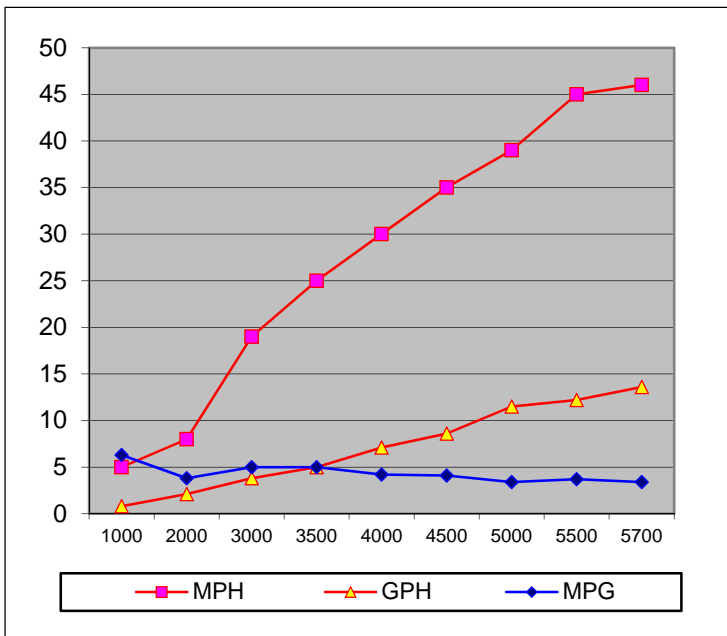

Time to plane: N/A Seconds Acceleration 0-30 MPH: 7 Seconds




Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Mercury reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



Performance Bulletin – 200 Pro V ET



RPM	MPH	GPH	MPG
1000	4.9	1.1	4.46
1500	7.2	1.8	4.0
2000	9.8	2.8	3.5
2500	15.0	3.6	4.17
3000	21.7	4.3	5.05
3500	29.3	5.7	5.14
4000	34.4	7.3	4.71
4500	40.1	9.9	4.05
5000	44.9	12.6	3.56
5500	49.8	15.1	3.30
5700	53.1	17.1	3.11

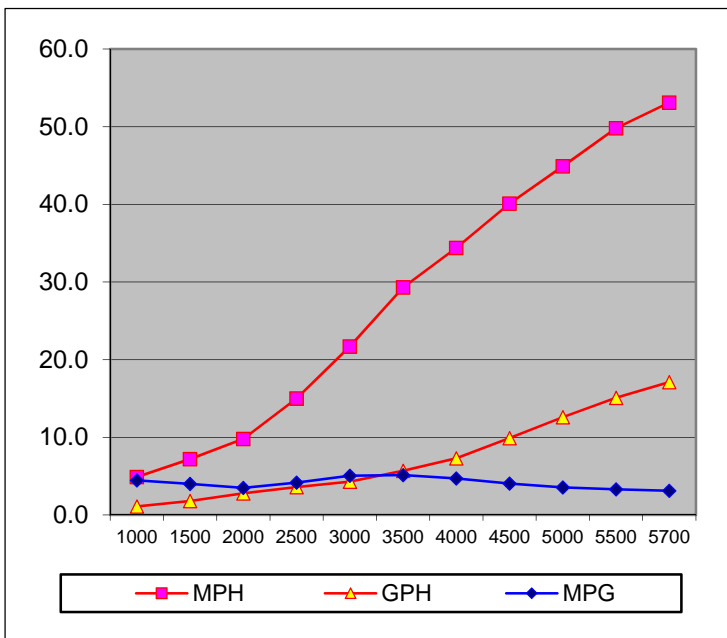

Time to plane: 3.65 Seconds Acceleration 0-30 MPH: 5.92 Seconds

Hewescraft® 200 Pro V ET

Test Date 8/28/12

Length	22'8"
Beam	94"
Dry Weight (Boat only)	1,925 lbs
Maximum HP	200
Fuel Capacity	48
Weight as tested (Approximate)	3,052 lbs

Note: Test weight includes ½ tank of fuel, 1 battery, safety & test Equipment

Yamaha F200 XA

Horsepower	200 HP
Displacement	3.3 L
Dry Weight (engine)	608 lbs
Gear Ratio	2.00
Mounting Height	#2

Propellers

Material /Blades	Polished SS / 3
Series	Pro Series
Diameter/Pitch	14 ¼ x 21
Yamaha Part #	6J9-45976-10-00

Test Conditions

Number of People	2
Air Temperature (Fahrenheit)	70 ° F
Elevation (in feet above sea level)	1,300 ft.
Wind Velocity	5-10 mph



Notice to Consumer: The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.