



# Performance Bulletin – 180 River Runner

Hewescraft® 180 River Runner Test Date: 2/28/18



|   |          |
|---|----------|
| Length  | 18'2"    |
| Beam  | 86"      |
| Dry Weight  | 1950 lbs |
| Maximum HP  | 250      |
| Fuel Capacity   | 34 gal   |
| Weight as Tested (approximate)  | 2434 lbs |
| <small>(Note: includes 12 gallons of fuel, 1 battery, 2 people)</small> |          |

| RPM      | MPH  | GPH | MPG |
|----------|------|-----|-----|
| 2000     | 4    | 0   | -   |
| 2500     | 5    | 0   | -   |
| 3000     | 6    | 1   | 6   |
| 3500     | 6.5  | 1   | 6.5 |
| 4000     | 7.5  | 2   | 3.8 |
| 4500     | 9.5  | 3   | 3.2 |
| 5000     | 15   | 4   | 3.8 |
| 5500     | 25.5 | 5   | 5.1 |
| 6000     | 29.5 | 6   | 4.9 |
| 6500     | 34   | 8   | 4.3 |
| 7000     | 37.5 | 10  | 3.8 |
| 7500     | 40.5 | 14  | 2.9 |
| 7920 WOT | 43.5 | 16  | 2.7 |


## ROTAX® 4-TEC 200

|                     |  |
|---------------------|--|
| Horsepower          | 207 HP   |
| Fuel Induction      | Multipoint Fuel Injection w/<br>Intelligent throttle control |
| Description:        | Super Charger - Intercooler                                  |
| Cooling System      | Liquid cooled,<br>closed loop cooling circuit                |
| Displacement        | 1,494 cc.  |
| Dry Weight (engine) | 192 Lbs  |
| Jet pump            | Axial Flow   |
| Impeller            | 4 blade, progressive pitch, stainless steel                  |
| Dry weight (pump)   | 30 lbs   |
| Stroke              | 4 Stroke   |
| Exhaust System      | Thru-transom, w/ muffler & resonator                         |

## Test Conditions

|                                      |           |
|--------------------------------------|-----------|
| Number of People                     | 2         |
| Air / Water Temperature (Fahrenheit) | 35° F/ NA |
| Elevation (in feet above sea level)  | 1,290 ft. |
| Wind Velocity                        | 0- 5 mph  |

**ROTAX®**

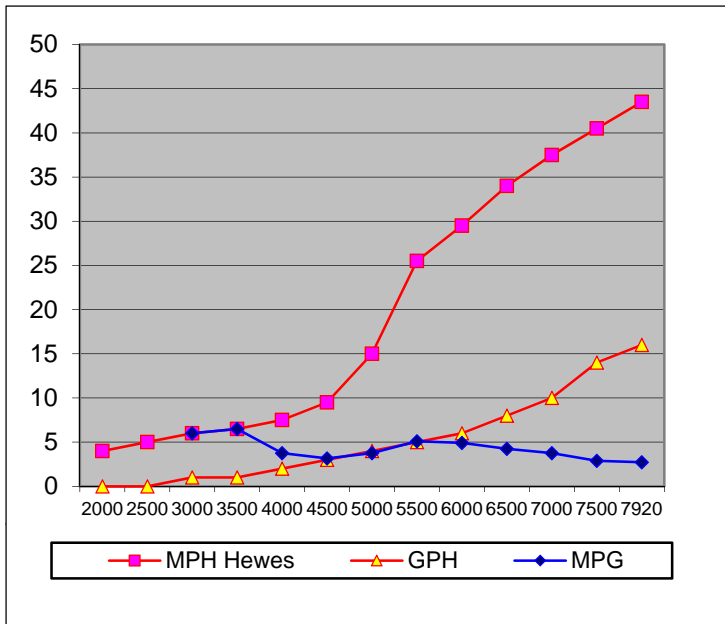

0-20 MPH = 3.8 seconds 0-30 MPH = 5.9 seconds

**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. BRP/Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.



# Performance Bulletin – 200 River Runner

Hewescraft® 200 River Runner

Test Date 12-12-2017




|   |           |
|---|-----------|
| Length  | 20'2"     |
| Beam  | 86"       |
| Dry Weight  | 2,150 lbs |
| Maximum HP  | 250       |
| Fuel Capacity   | 43 gal    |
| Weight as Tested (approximate)  | 2,647 lbs |
| <small>(Note: Includes 1/3 tank of fuel, 1 battery, &amp; 2 people)</small> |           |

## ROTAX® 4-TEC 250

|                     |  |
|---------------------|--|
| Horsepower          | 244 HP   |
| Fuel Induction      | Multipoint Fuel Injection w/<br>Intelligent throttle control |
| Description:        | Super Charger - Intercooler                                  |
| Cooling System:     | Liquid cooled,<br>closed loop cooling circuit                |
| Displacement        | 1,494 cc   |
| Dry Weight (engine) | 186 lbs  |
| Jet pump            | Axial Flow   |
| Impeller            | 4 blade, Progressive pitch, stainless steel                  |
| Dry weight (pump)   | 30 lbs   |
| Stroke              | 4 stroke   |
| Exhaust System      | Thru-transom w/ muffler & resonator                          |

| RPM        | MPH  | GPH | MPG |
|------------|------|-----|-----|
| 2000       | 5.2  | 1   | 5.2 |
| 2500       | 6.3  | 1   | 6.3 |
| 3000       | 7.0  | 1   | 7.0 |
| 3500       | 7.9  | 1   | 7.9 |
| 4000       | 9.1  | 2   | 4.6 |
| 4500       | 12.0 | 3   | 4.0 |
| 5000       | 19.5 | 4   | 4.9 |
| 5500       | 27.4 | 6   | 4.5 |
| 6000       | 31.3 | 7   | 4.5 |
| 6500       | 35.4 | 10  | 3.5 |
| 7000       | 38.7 | 12  | 3.2 |
| 7500       | 42.8 | 16  | 2.8 |
| 8000 - WOT | 46.2 | 19  | 2.4 |

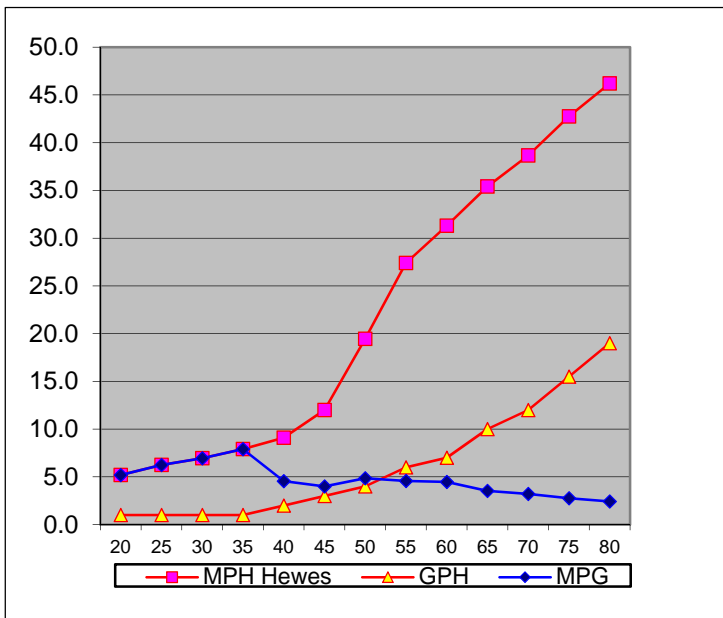

## Test Conditions

|                                      |            |
|--------------------------------------|------------|
| Number of People                     | 2          |
| Air / Water Temperature (Fahrenheit) | 28° F / NA |
| Elevation (in feet above sea level)  | 1,290 ft.  |
| Wind Velocity                        | 0-2 mph    |

**ROTAX**



**Notice to Consumer:** The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and should not be relied upon as representative of actual performance. Your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Please confirm the specifications and performance data on your specific boat/engine combination with your dealer prior to purchase. BRP/ Hewescraft reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains valuable trademarks belonging to Hewescraft and other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.